

## SPECIFICATION OF METAL STRAIGHT CONNECTORS

### **Material**

High quality thick zinc alloy

Nitrile Rubber

Tin

### **Protection**

IP 65

### **Temperature**

-40°C to 100°C

Short term to +120°C

### **Colour**

Metallic (Silver White)


### **Properties**

Strong Tensile Strength

Waterproof

Dustproof

Salt and Alkalies Resistant

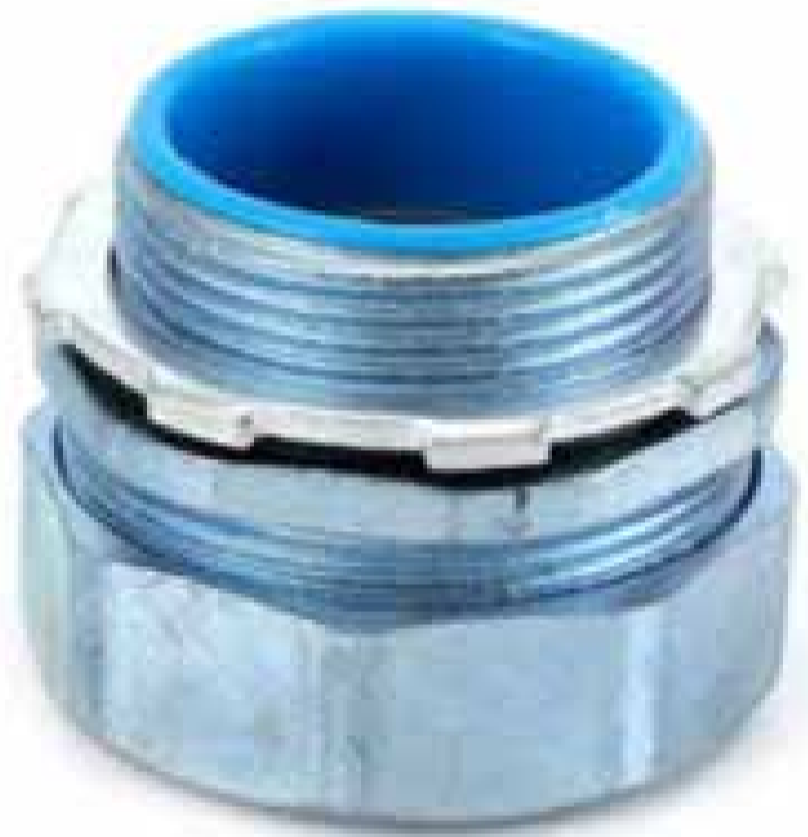

## DETAILED DATA OF METAL STRAIGHT CONNECTORS

ITEM NO.	G SYSTEM	OUTER DIAMETER (mm)	THREAD LENGTH (mm)	JOINT LENGTH (mm)	STD PKG
MDPJ-6	3/16 "	13.2	8	16	100
MDPJ-8	5/16 "	13.2	8	16	100
MDPJ-10	1/4 "	16.5	8	17	100
MDPJ-13	3/8 "	16.5	8	18	100
MDPJ-16	1/2 "	21.3	11	23	100
MDPJ-20	3/4 "	26.6	14	22	50
MDPJ-25	1 "	33.4	15	28	50
MDPJ-32	1 1/4 "	42.1	15	30	25
MDPJ-38	1 1/2 "	47.8	16	32	25
MDPJ-51	2 "	59.6	18	34	10
MDPJ-64	2 1/2 "	75.1	22	38	10
MDPJ-75	3 "	87.8	22	46	5
MDPJ-100	4 "	113	24	50	5
MDPJ-125	5 "	-	-	-	5
MDPJ-150	6 "	-	-	-	2